


REMARK

1. Glass Thk: 0.7mm
2. Film Type: Non-Glare
3. Total Thk: 0.95 ± 0.15 mm
4. Linearity: $\pm 1.8\%$ or less
5. Transmittance: 80% or more
6. Resistance
 - $100 < Y < 1200$ ohm
 - $100 < X < 1200$ ohm
7. Connector: FPC
8. General Tolerance: ± 0.5





CIRCUIT DIAGRAM

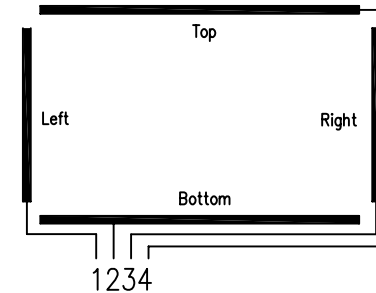

SIGNAL ASSIGNMENT

Pin No	Signal
1	Left
2	Bottom
3	Right
4	Top

Detail "AA"

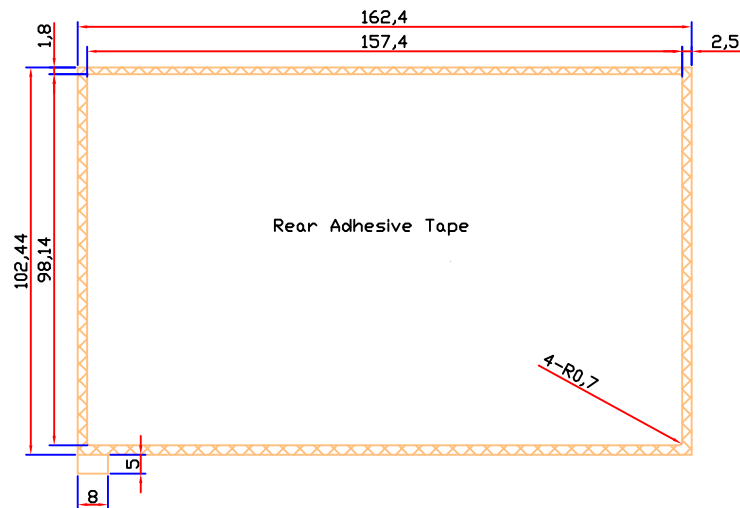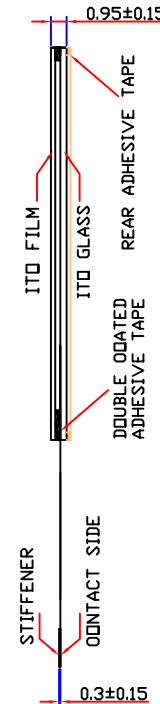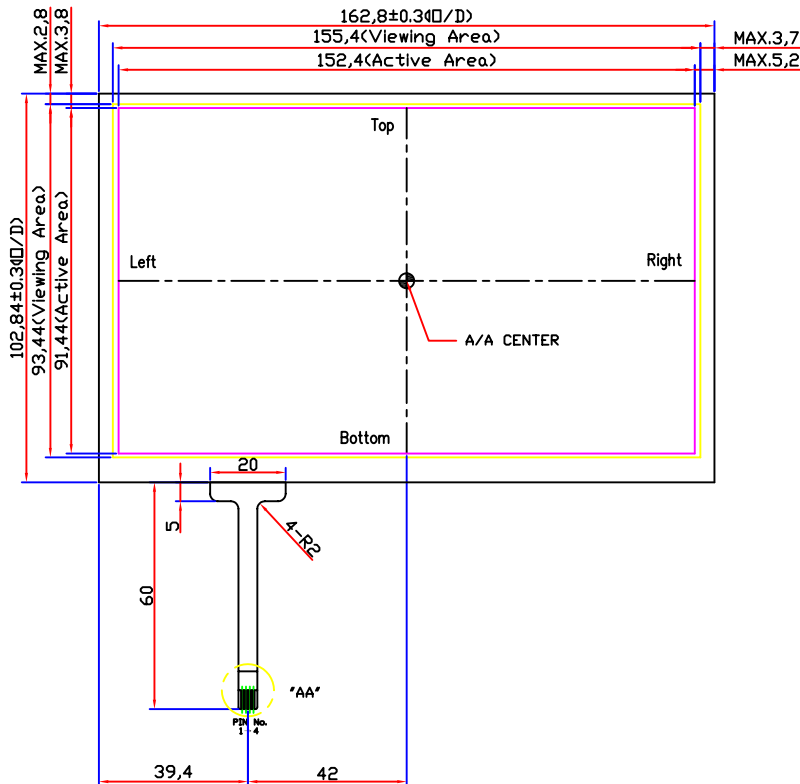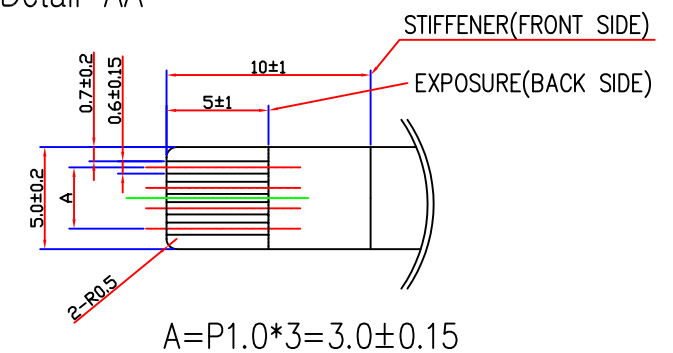

NOTE: The HantouchUSA Incoming Inspection Standard is part of this drawing. This quality and performance document can be viewed at: www.hantouchUSA.com, under Incoming Inspection Standards.

APPROVE	STD.TOL	UNIT	mm	DRAWING NO.	REV.				
CHECK		SCALE	NONE	HW070A-NCNBD62-R					
DESIGN				DESCRIPTION	SHEET				
REV.No.	REVISED	DATE	DRAWN	CHECKED	APPROVED	DRAW	Han touch USA Touch Screen Specialists	7.0" TOUCH PANEL	1/1

0	NEW DRAW	06.11.24	H.Y. IM	K.B. KIM	M.K. CHO
REV.No.	REVISED	DATE	DRAWN	CHECKED	APPROVED